

Micro Contactor MA



- Relay-size contactor, making it the smallest in the world
- >3mm contact clearance acc. to IEC 60335-1 for Safety Applications
- Reversing contactor with mechanical interlock
- 3 Pole and 1 Aux. Contact NO or NC
- 5A AC3 @ 400VAC (2.2kW) – 12A AC1 @ 400VAC
- AC coil voltages – TS15 Din rail mounting
- DC coil and PCB mounting pending



Technical Data acc. to IEC 60947-4-1

	Type	MA05-S MA05-R-S
Main contacts		
AC1 Ie (=Ith) open at 40°C	A	12
AC2, AC3 400V	A	5
400V	kW	2.2
Fuse	"Typ1" gL (gG)	A max.
Cable Cross-Section		
Solid	mm ²	0,5 - 1,5
Flexible	mm ²	0,5 - 1,5
Solid	AWG	18 - 14
Flexible	AWG	18 - 14
Clamps per pole		2
Terminals		
Terminal Screws		M2,5
Screw Driver	Pozidriv	Pz0
Tightening Torque	NM	0,6
Coil AC-operated (24VAC / 110VAC / 230VAC / 400VAC)		
Operation Range		0,85 - 1,1
Inrush VA 17	VA	17
Hold VA 2,5	VA	2.5

Technical Data for North America acc. to UL508


	Type	MA05-S MA05-R-S
Main Contacts (CULus)		
Rated operational current "General Use"	A	12
Rated operational power of three phase motors at 60Hz (3ph)	hp	0.5
	hp	1
	hp	1
	hp	1.5
Rated operational power of AC motors at 60Hz (1ph)	hp	0.16
	hp	0.5
	hp	0.75
Fuse / Short-circuit current	A/kA	30/5
Rated voltage	V~	300
Auxiliary contacts (cULus)		
	AC	-
	DC	-

 Pending


Micro Contactor MA



Wiring Diagrams

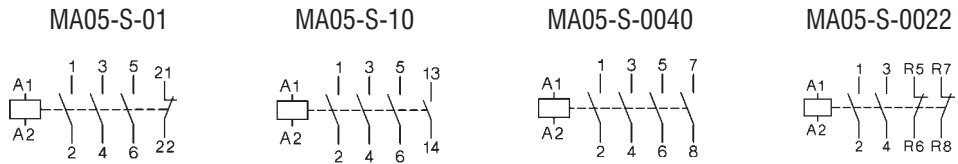

Reversing Contactors

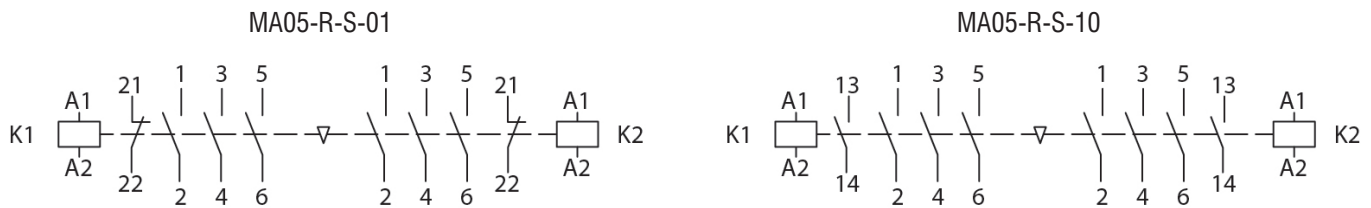

Dimensions for Contactors and Reversing Contactors

