

SLOTTED WIRING DUCT (SINGLE SCORED)

CARROLL offer the widest range of slotted wiring duct to suit all applications. Approved to both UL and CSA standards, **CARROLL** ducting meets all customer requirements for quality, range and value for money.

CODE	PART NO.	WIDTH x HEIGHT	LENGTH m	COLOUR	PACK QTY
BC	SD2525	25 x 25	2	GREY	12
	SD2530	25 x 30	2	GREY	12
	SD2540	25 x 40	2	GREY	12
	SD2550	25 x 50	2	GREY	12
	SD2560	25 x 60	2	GREY	12
	SD2575	25 x 75	2	GREY	12
	SD4040	40 x 40	2	GREY	12
	SD4060	40 x 60	2	GREY	12
	SD4080	40 x 80	2	GREY	12
	SD5050	50 x 50	2	GREY	12
	SD5075	50 x 75	2	GREY	12
	SD6040	60 x 40	2	GREY	12
	SD6060	60 x 60	2	GREY	12
	SD6080	60 x 80	2	GREY	12
	SD70100	70 x 100	2	GREY	8
	SD7575	75 x 75	2	GREY	8
	SD8060	80 x 60	2	GREY	8
	SD8080	80 x 80	2	GREY	8
	SD100100	100 x 100	2	GREY	8
	SD10060	100 x 60	2	GREY	8



SLOTTED DUCT

SLOTTED WIRING DUCT REPLACEMENT LIDS

CODE	PART NO.	WIDTH mm	LENGTH m	COLOUR	PACK QTY
BC	SDLID25	25	2	GREY	1
	SDLID40	40	2	GREY	1
	SDLID50	50	2	GREY	1
	SDLID60	60	2	GREY	1
	SDLID70	70	2	GREY	1
	SDLID75	75	2	GREY	1
	SDLID80	80	2	GREY	1
	SDLID100	100	2	GREY	1



DIN RAIL



DIN3515S




DIN3575S

DIN RAIL CHANNEL

Our selection of Din Rail Channels strengthens our offering to allow greater choice for the customer when selecting their desired cable or wire cradling method. The **CARROLL** range is manufactured from quality cold rolled steel and is finished with a zinc electro plating and a yellow passivation finish.

CODE	PART NO.	A mm	B mm	LENGTH m	STEEL THICKNESS mm	PACK QTY
BC	DIN3515S	35	15	2	1.5	10
	DIN3575S	35	7.5	2	1	10

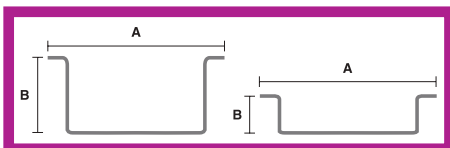

DIN RAIL