


# HP05

## Pendant control station

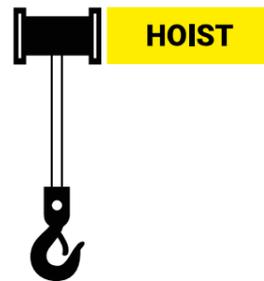

### Ergonomic pendant control station with five push buttons for hoist

#### Features

- Bi-directionality is mechanically interlocked;
- IP65 Double insulation (IEC / EN 60529);
- Laser engraved symbols according to EN 60204-1, FEM 9.941;
- Shock proof and heat resistant;
- Available versions: for single or double speed motors;
- Available with UL/CSA requirements.

#### Available codes

|                             |  |  |  |  |  |  |  |  |  |  |
|-----------------------------|--|---|---|---|---|---|---|---|---|---|
| HP05 Single speed           | NC   | NO  | NO  | NO  | NO  |   |   |   |   |   |
| HP05.D2 Single/Double speed | NC   |   |   | NO  | NO  | NO+NO   | NO+NO   |   |   |   |
| HP05.D4 Double speed        | NC   |   |   |   |   | NO+NO   | NO+NO   | NO+NO   | NO+NO   |   |

#### Compliance and certifications

- EN 60947-1 (2007/A1 : 2011/A2 : 2014)
- EN 60947-5-1 (2004/A1 : 2009/AC : 2004/AC : 2005)
- EN ISO 13850 (2015)
- EN 60204-1 (2006/A1 : 2009)
- EN-ISO 13849-1 (2015)
- EN ISO 13849-2 (2012)
- EN 60529 (1991/A1 : 2000/A2 : 2013)
- EN 50581 (2012)
- IEC 63000 (2016)
- 2014/35/UE
- 2011/65/UE
- 2015/863/UE



#### Technical data

| General characteristics |                      |                                    |
|-------------------------|----------------------|------------------------------------|
| Compliant to standards  |                      | IEC / EN60947-5-1                  |
| Material                |                      | ABS V0                             |
| Material Group          |                      | II                                 |
| Pollution class         |                      | 3                                  |
| Temperature             | operating<br>storage | -25°C ... +70°C<br>-30°C ... +70°C |
| Cable entry             |                      | Cable gland M25                    |

#### Electrical characteristics - Contact blocks

|   |                                   |   |
|---|-----------------------------------|---|
| Marking                                     |                                   |       |
| Rated insulation voltage [Ui]               |                                   | 690 V *   |
| Rated impulse withstand voltage [Uimp]      |                                   | 4 kV *  |
| Frequency                                   |                                   | 50/60 Hz *  |
| Rated thermal current [Ith]                 |                                   | 16 A *  |
| Rated thermal current in enclosure [Ithe]   |                                   | 10 A  |
| <b>Rated operational current [Ie]</b>       |                                   |   |
| AC-15 alternate current                     | type: PCW..                       | 24 V 16 A *<br>60 V 12 A<br>110 V 5 A<br>240 V 5 A *<br>400 V 4 A<br>440 V 4 A<br>500 V 4 A *<br>690 V 2 A  |
| DC-13 direct current                        | type: PCW..                       | 24 V 2 A<br>48 V 2 A *<br>60 V 1 A *<br>110 V 0.4 A<br>250 V 0.4 A *  |
| Minimum constant current                    |                                   | 1 mA@5Vdc, 1 mA@24Vdc   |
| Conditional short circuit withstand current |                                   | 1000 A *  |
| Fuses rating gG                             |                                   | 10 A * - 500 V  |
| Contact insulation resistance               |                                   | ≤ 25 mΩ   |
| Switching mechanism                         | type: PCW..                       | slow break double gap contacts  |
| Positive operation                          |                                   | NC contact blocks - positive opening  |
| Operating force                             |                                   | 4 N   |
| Electric durability AC-15                   |                                   | 1 A 1.5 millions of cycles<br>2 A 0.5 millions of cycles<br>3 A 0.25 millions of cycles   |
| Terminal type                               | type: PCW..                       | M3.5 screw terminals  |
| Terminal capacity                           | type: PCW..                       | N° 1 or 2 flexible and solid conductor 1 ... 2.5 mm²  |
| Climate resistance                          | IEC68 part 2-3<br>IEC68 part 2-30 | damp heat, steady state<br>damp heat, cyclic  |

#### UL508 characteristics

|  |  |                                    |
|--|--|------------------------------------|
| Rated insulation voltage [Ui]          |  | 10 A - 600 V ac / 2.5 A - 125 V dc |
| Rated impulse withstand voltage [Uimp] |  | A600-Q600                          |

\* IMQ approved values

# HP05

## Pendant control station


Available codes



**HP05**

**HP05.D2**

**HP05.D4**

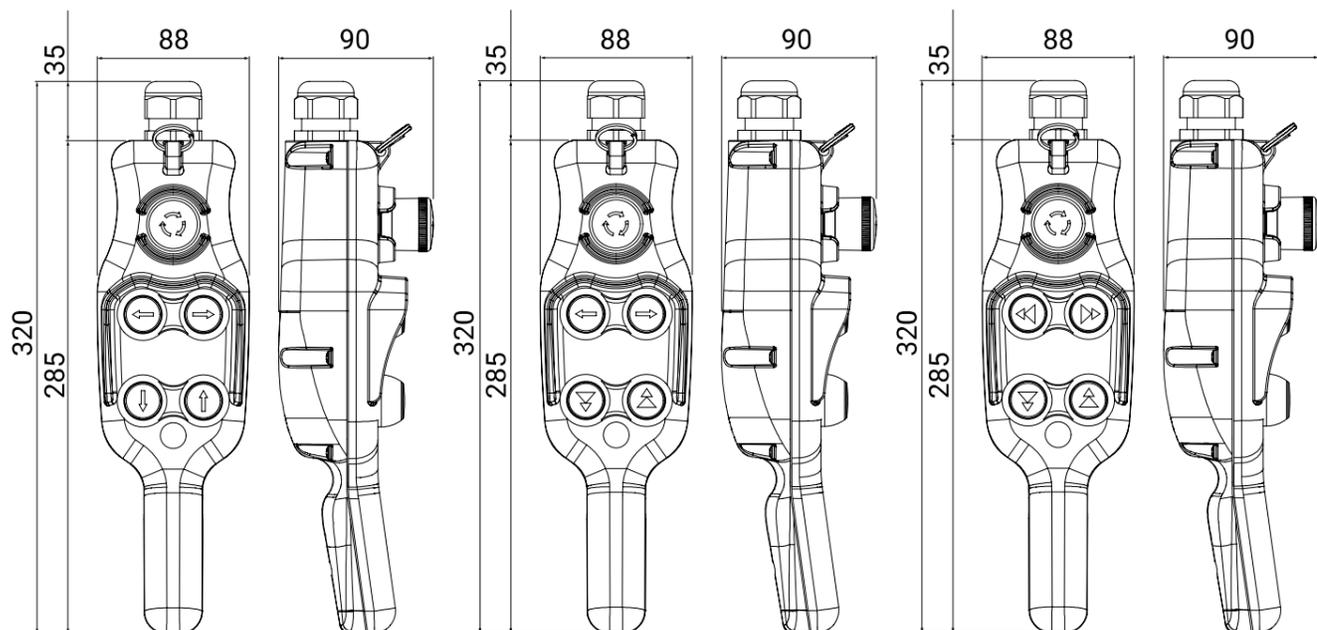

Standard versions

| PRODUCT CODE   | FUNCTION            | LAYOUT  | PUSH BUTTON   | CONTACT CONFIGURATION   |
|----------------|---------------------|---|---|---|
| <b>HP05</b>    | Single speed        |    |    |  1 NC      |
|                |                     |   |    |  1 NO      |
|                |                     |   |    |  1 NO      |
|                |                     |   |    |  1 NO      |
|                |                     |   |    |  1 NO      |
| <b>HP05.D2</b> | Single/Double speed |   |    |  1 NC      |
|                |                     |   |    |  1 NO      |
|                |                     |   |    |  1 NO      |
|                |                     |   |  |  NO + NO |
|                |                     |   |  |  NO + NO |
| <b>HP05.D4</b> | Double speed        |  |  |  1 NC    |
|                |                     |   |  |  NO + NO |
|                |                     |   |  |  NO + NO |
|                |                     |   |  |  NO + NO |
|                |                     |   |  |  NO + NO |

**CONTACT CODE**

Single speed



**PCW01**



**PCW10**

Double speed



**PCWDS**