

CONVEYOR BELT MISALIGNMENT DEVICE

2MM 316 ELECTRO POLISHED
STAINLESS STEEL



Illustration only, actual product may differ.
Photograph displays vertical roller arm fitted.
Order as separate item

Tested to IP66/69K
CE Conformity

The Safe-T-Drift heavy duty Protective Stop Control Belt Misalignment Device, is made for applications requiring a unit which caters for high speed belt applications, having a cam driven drift alarm micro switch with direct opening action and direct opening action trip micro switch. The cams are individually adjustable for finer alarm and trip points.

The device may be ordered in either the standard right handed shaft operation or left handed shaft. It's unique dual direction sprung cam operator system coupled with the IP66/69K high speed roller ensures long, trouble free operation, in the most severe environmental situations.

DEVICE FEATURES

- » 316 2mm electro polished stainless steel enclosure to IP66/69K.
- » All external fixings etc. are 316 Stainless Steel.
- » Operating shaft bearings are UV stable, flame retardant 15% GF nylon, for long maintenance free operation.
- » Operating shaft sealing via a double lip oil seal, with external dust protecting boot.
- » 90° full movement of operating arm with easily adjustable switching points from 5° to 75°.
- » Standard unit has both **Alarm & Trip** S.P.D.T Change-over Safety Micro Switches with Direct Opening Action (IEC 60947-5-1 Annex K) in contact element form C tested and passed too IEC 60947-5-1.
- » Micro switches pre wired to tunnel terminals.

ROLLER ARMS:

- » Solid or sprung shaft roller mounting arms, available either vertical or horizontal.
- » Rollers are IP66/67K 316 Polished Stainless Steel and available in either 50mm diameter or 25m diameter with high speed sealed bearings.
- » Arms are fully adjustable through 360°.

ENCLOSURE SPECIFICATIONS

316 2mm electro polished stainless steel enclosure to IP66/69K.

STANDARDS COMPLIANCE

AS/NZS 4024 Series AS/NZS IEC 60947.5.1:2015 IEC 60947.5.1:2016 RLV

WHS Regulations 2022 part 5.1 division 2, 187




FOR MORE INFORMATION

www.safe-t-products.com.au



DIMENSIONS

STD-SSB DEVICE SHOWN

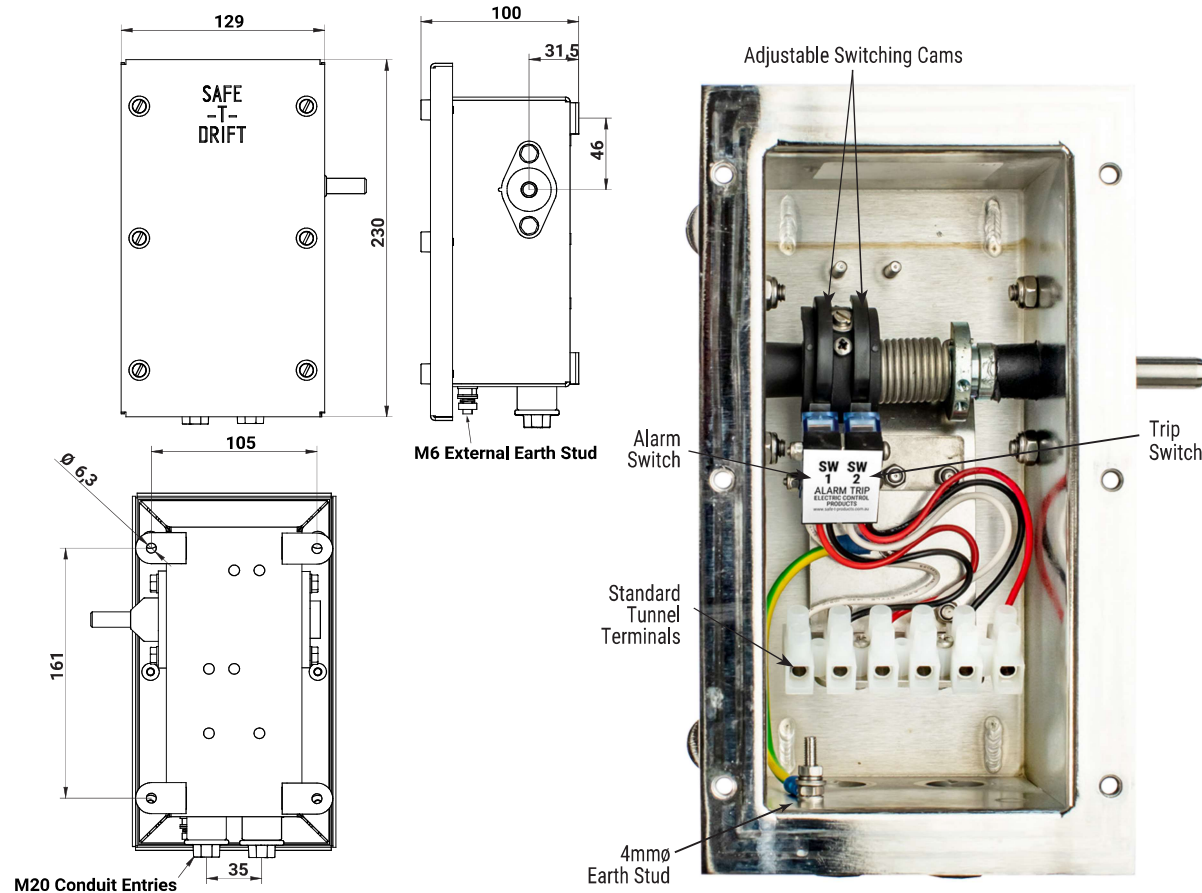

STICKERS

SAFE-T-DRIFT SW1/SW2
Form C, IP66/67

WHITE	BLACK	RED	WHITE	BLACK	RED
14 (NO)	11 (C)	12 (NC)	24 (NO)	21 (C)	22 (NC)
1.	2.	3.	4.	5.	6.

Term No.

Tested to IEC 60947-5-1 2016
AC-15 250VAC /1.5A DC-13 60V DC /0.5A

Specifications (short-circuit with standability)	
Rated condition short-circuit current	1 000 A
Short-circuit protective device	Fuse 6 A 690V gG (IEC 60269-1&2)

ECPGS-004

SAFE-T-DRIFT SW3/SW4
Form C, IP66/67

WHITE	BLACK	RED	WHITE	BLACK	RED
34 (NO)	31 (C)	32 (NC)	44 (NO)	41 (C)	42 (NC)
7.	8.	9.	10.	11.	12.

Term No.

Tested to IEC 60947-5-1 2016
AC-15 250VAC /1.5A DC-13 60VDC /0.5A

Specifications (short-circuit with standability)	
Rated condition short-circuit current	1 000 A
Short-circuit protective device	Fuse 6 A 690V gG (IEC 60269-1&2)

ECPGS-005

ELECTRICAL SPECIFICATIONS

IP 67 Safety Micro Switch with Direct Opening Action Specifications

IEC 60947-5-1 Annex K classification	<input type="checkbox"/> Type 1	<input checked="" type="checkbox"/> Type 2 Direct Opening
Change-over contact element	<input checked="" type="checkbox"/> C	<input type="checkbox"/> Za <input type="checkbox"/> Zb
Contact material	Ag-Ni	
Utilization category	AC-15	DC-13
Operational voltage	230 V	60 V
Operational current	1,5 A	0.5 A
Frequency	50/60 Hz	-----
Number of electrical cycles	6050 (6 min-1)	
Number of mechanical cycles	6050 (6 min-1)	
Conventional free air thermal current	10 A	
Conventional enclosed thermal current	-----	
Operating Temperature	-35° C No Icing	+80° C

Specifications (short-circuit with standability)

Rated conditional short-circuit current	3 00 A	1 000 A
Short circuit protective device	Fuse 6 A gG (IEC 60269-2)	Fuse 6 A gR (IEC 60269-4)

ORDERING DETAILS

NOTE: Order Device and Roller Arm

DEVICE TYPE	PART NUMBER
Single Direction Switching (ECPGS-004)	STD-SSB
Dual Direction Switching (ECPGS-004)+(ECPGS-005)	STD-SSB-D
Single Direction Switching - DIN Rail Terminals Fitted (ECPGS-004)	STD-SSB-K
Dual Direction Switching - DIN Rail Terminals Fitted (ECPGS-004)+(ECPGS-005)	STD-SSB-D-K
Horizontal Roller Arm	STD-HA
Horizontal Sprung Roller Arm	STD-HASR
Vertical Roller Arm	STD-VA
Vertical Sprung Roller Arm	STD-VASR

Other variations available: Contact your distributor